

## QUALITY CERTIFICATE

№ 2603-128 Issued Date: 10.03.2026

**Manufacturer: PlasmaTec LLC**  
18 Pravednykiv svitu str., Vinnytsia, Vinnytsia  
region, Vinnytsia district, Ukraine, 21036

<b>Product</b>
<b>Welding electrodes Monolith 7018-1 H4R TM MONOLITH d 2.5 mm (3/32"): vacuum 2 kg (4.4 LB)</b>

<b>Specification/Classification</b>	AWS A5.1 / SFA-5.1: E7018-1 H4R EN ISO 2560-A- E 46 5 B 3 2 H5 CSA W48: E4918-1 H4 4Y46H5
<b>Batch classification according to EN ISO 14344</b>	<b>C5</b>
<b>Lot Number</b>	<b>001</b>

### Mechanical properties of weld metal EN 10204, type 2.2

Index	Requirements (AWS A5.1)	Typical data
Tensile strength, (MPa/ksi)	min. 490 (70)	579 (84)
Elongation, %	min. 22	28
Yield strength, (MPa/ksi)	min. 400 (58)	497 (72)
Impact energy (KV), J/(ft-lb) (-50°C/-58°F)	min. 27 (20)	87 (64)
Diffusible hydrogen, ml/100g	max. 4	3.2


### Chemical analysis of weld metal, % EN 10204, type 3.1

Index	Requirements (AWS A5.1)	Actual data
C	max. 0.15	0.07
Si	max. 0.75	0.5
Mn	max. 1.6	1.28
P	max. 0.035	0.028
S	max. 0.035	0.008
Cr	max. 0.2	0.07
Ni	max. 0.3	0.02
Mo	max. 0.3	0.003
V	max. 0.08	0.01
Mn+Cr+Ni+Mo+V	max. 1.75	1.383

**Post weld heat treatment - As welded**

The product was manufactured and supplied according to a Quality System Program that meets the requirements of ISO 9001. The delivery conditions are in accordance with EN ISO 544.

**Head of Technical Control: Andrii Babyn**

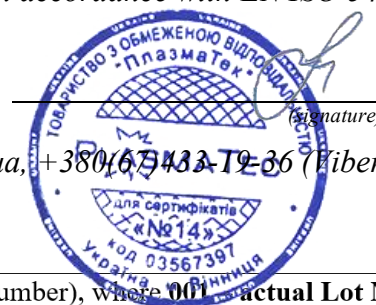

quality@plasmatec.com.ua, +380(67)433-19-36 (Viber, WhatsApp, Telegram)

Lot Number identification: **001 3.2 XO** (example of Lot number), where **001** - actual Lot Number, 3.2 XO - additional information (3.2 - electrode size in mm; X - pressing team, O - packing team)